

20 April 2000 (20.04.00)

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

```

graph TD
    Start([46]) --> ReadURL[50: Read URL from FILE]
    ReadURL --> AnalyzeURL[52: ANALYZE THE URL  
CONTAINING FILE  
IN THE URL  
AND STORE IT  
IN LIST]
    AnalyzeURL --> StoreURL[54: STORE URL IN LIST]
    AnalyzeURL --> Decision{56: DECIDE?}
    Decision -- YES --> SendHTTP1[60: SEND HTTP TO SERVER  
(FOR GETTING)]
    Decision -- NO --> SendHTTP2[66: SEND HTTP TO SERVER  
(FOR POSTING)]
    SendHTTP1 --> ReceiveData1[62: RECEIVE DATA FROM SERVER]
    ReceiveData1 --> CreateNewFile[64: CREATE NEW CRAWLER FILE]
    SendHTTP2 --> ReceiveData2[68: RECEIVE DATA FROM SERVER]
    ReceiveData2 --> CreateEditFile[70: CREATE/EDIT CRAWLER FILE]
    CreateNewFile --> AnalyzeURL
    CreateEditFile --> AnalyzeURL
    Decision -- YES --> SendHTTP3[72: SEND HTTP TO WEB SITE & RECEIVE HTTP/HTML]
    SendHTTP3 --> AnalyzeStore[76: ANALYZE & STORE HTMLS IN CRAWLER FILE]
    AnalyzeStore --> AnalyzeURL
  
```

The flowchart illustrates a web crawler process. It begins with a start node (46) leading to a step (50) to read a URL from a file. This leads to a central node (52) for analyzing the URL, which contains a file path. From here, the process branches into two main paths: one for GET requests (54, 60, 62, 64) and one for POST requests (66, 68, 70). Both paths lead back to the central analysis node. Additionally, there is a direct path (72, 76) for sending HTTP requests and storing the received HTML content. A decision node (56) determines the type of request to send based on whether the URL contains a file name.

A method (46) for testing a web site (14) includes formulating a test configuration file (172) including a series of test inquiries (174, 176, 178, 180, 182, 184) for a web site (14) to be tested, initiating an HTTP communication to form a connection with the web site (14), and repetitively communicating with the web site (14) to test for a variety of errors. The repetitive communication preferably includes receiving HTML from the web site, analyzing the HTML for errors and storing results in the database, and formulating a new HTTP communication based upon the received HTML and the test configuration file. Preferably, the test configuration file (172) is created by sending HTML comprising a blank testing form to a web browser (48), receiving HTTP from the web browser (48) as a submission from the HTML testing form, and developing the test configuration file (172) from the HTTP.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method and Apparatus for Testing Web Transactions

BACKGROUND OF THE INVENTION

5 This invention relates generally to wide area networks, and more particularly to the testing of web sites hosted by web servers coupled to a TCP/IP protocol network.

10 The Internet has, of late, become ubiquitous. The Internet is a robust, Wide Area Network (WAN) of networks which permits communication among computers, networks, and other digital devices which adhere to a standard "TCP/IP" protocol. One of the most popular ways of communicating over the intersite is through a "web site" which is hosted on a suitable digital processing machine such as a personal computer, workstation, etc. Users or "clients" use, for example, their personal computers to communicate with a web site via a browser program or, simply, "browser." The most commonly used browsers are the Navigator™ from Netscape Communications, Inc., and the Internet Explorer™ from Microsoft, Inc.

15 It has become increasing simple for companies and individuals to create their own web sites. There are a number of commercially available packages which generate the necessary HTML code to create "web pages" which can be uploaded to web servers connected to the Internet. Connections to the Internet and web server hosts are often provided by a company known as an Internet Service Provider (ISP).

20 Since web pages are, essentially, programs written in the HTML language, it is possible that one or more web pages of a web site contains errors. These errors may only show up intermittently since much of the interaction with the web site can be dynamic, i.e. it can change from session to session. Therefore, the need has arisen for some method to test web sites for errors.

25 In Fig. 1, a system 10 for testing a web site includes a TCP/IP protocol network 12, such as the Internet, a web server 14 coupled to the Internet 12 by an ISP 16, any number of user or client machines such as client machines 18A, 18B, 18C, etc. coupled to the Internet 12 by ISP's 20A, 20B, 20C, etc., and a testing computer 22 coupled to the Internet 12 by an ISP 24.

30 In the prior art, software running on the testing computer 22 connects with a web site 26 hosted by the web server 14 through the Internet 12 and attempts to download web pages. Upon a failure to download a web page, the testing computer 22 running this prior art software detects an error.

It should be noted that a depiction of Fig. 1 is logical in nature, and may be implemented in a variety of fashions. For example, the testing computer 22 and the web server 14 can be the same machine. As another example, any of the client machines 18A, 18B, 18C, etc., or the testing computer 22, or the web server 14 can be connected into the Internet 12 in other fashions, such as into the "backbone" of the Internet. Further the Internet is only one example of a network 12 implementing a TCP/IP protocol. Other examples of TCP/IP protocol networks include intranets and extranets, as will be appreciated by those skilled in the art.

The testing computers 22 of the prior art include testing software which simulate browser software to the extent that they can download web pages. The successful downloading of a web page in the prior art was usually considered sufficient to determine that that web page was error free. In some instances, prior art testing computers 22 may examine or "parse" the HTML of the downloaded web page to make further determination whether there is an error in the downloaded web page. An example of prior art testing software includes the WhatsUp™ software of IpSwitch, Inc. of Lexington, Massachusetts (<http://www.ipswitch.com>). This software is capable of testing only a single web page.

Unfortunately, the simple downloading of web pages with, perhaps, a cursory examination of the HTML is often insufficient to determine all the errors that a user might encounter when actually interacting with those web pages. This is due, in part, to the complex interactivity permitted under the HTML standards, and is due, in part, to the fact that many interactions with web pages are "dynamic" in that they may change from session to session. It would therefore be desirable to have a method for testing a web site which can test multiple features of web pages, and which can handle dynamic interactions with the web site.

SUMMARY OF THE INVENTION

The present invention provides a method, apparatus, and system for testing a web site. The invention handles a number of interactive modes with the web site being tested, and
5 handles dynamic interactions with the web site..

A method for testing a web site in accordance with the present invention formulates a test configuration file comprising a series of test inquiries for a web site, initiates an HTTP communication to form a connection with the web site, and repetitively communicates with the web site. More particularly, the method repetitively communicates with the web site by
10 receiving HTML from the web site, analyzing HTML for errors and storing the results in the database, and then formulating a new HTTP communication to the web site based upon the received HTML and the test configuration file.

The operation of formulating a test configuration file preferably includes sending HTML comprising a blank testing form to a web browser, receiving HTTP from the web
15 browser as a submission from the testing form and developing the test configuration file from the HTTP received from the web browser. In this fashion, a standard web browser can be used as the interface between the test operator and the testing software. Preferably, the web browser can also be used to edit test configuration file that has already been developed.

An apparatus for testing a web site includes a computer having memory and a
20 processor, and a monitor object residing at least partially in the memory and executed by the processor. The monitor object includes an initiator to establish an HTTP communication between the monitor object and a web site and a repetitive communicator which repeatedly receives HTML from the web server, analyses the HTML for errors and stores the results in a database, and formulates a new HTTP communication based on the received HTML.
25 Preferably, the apparatus also includes a scheduler residing at least partially in the memory and executed by the processor which is operative to invoke the monitor object, determine whether the monitor object is scheduled to be run, and run the monitor object as scheduled to initiate the HTTP communication to form a connection with the web site by repetitively communicating with the web site.

A system for testing a web site includes a TCP/IP protocol network, a web server
30 connected to the TCP/IP protocol network and hosting a web site, and a testing computer having memory and a processor that is connected to the TCP/IP protocol network. The testing computer is operative to formulate a test configuration file stored in the memory including a

series of test inquiries for a web site to be tested, to initiate an HTTP communication to form a connection with the web site and to repetitively communicate with the web site by receiving HTML from the web site, analyzing the HTML for errors, and storing the results in a database, and formulating a new HTTP communication based upon the received HTML and test configuration file.

An advantage of the present invention is that a web site can be thoroughly tested in a variety of interactive modes. Also, the present invention allows for the testing of changeable or "dynamic" features of the web site. In consequence, the present invention facilitates the thorough testing of web sites for errors and generates reports which aids in the correction of the detected errors. Other advantages include the capability of immediately providing a notification of any problems, and the reporting of performance and service levels.

These and other advantages of the present invention will become apparent to those skilled in the art upon a reading of the following descriptions of the invention and a study of the several figures of the drawing.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an illustration of a system including the Internet, a number of client machines, a web server, and a testing computer;

5 Figure 2 is a pictorial representation of a testing computer 22' of the present invention;

Figure 2A is a pictorial representation of testing software implementing the present invention, as well as standard web browser software;

Figure 2B is a flow-diagram illustrating the overall operation of the present invention;

10 Figures 3A-3E illustrate a series of HTML web pages that will be used as an example when explaining the present invention;

Figures. 4A-4C illustrate a blank form used to develop the testing configuration file of the present invention;

Figure 5 is a illustration which helps an explain a HTML "form";

15 Figure 6 is an exemplary test configuration developed by the process of the present invention from the web pages of Figs. 3A-3E;

Figure 7 is a flow-diagram illustrating the "ANALYZE CONFIGURATION FILE ACTIVATION SCHEDULE" operation of Fig. 2B;

Figure 8 is a flow-diagram of the "SEND HTTP TO WEB SITE AND RECEIVE HTTP/HTML" operation of Fig. 2B;

20 Figure 8A is a flow-diagram detailing "FIND ALL FIELDS ON FORM WITH SUBMIT BUTTON" operation of Fig. 8;

Figure 8B is a flow-diagram illustrating the "TAKE SUPPLIED POST DATA AND OVERWRITE VALUES" operation of Fig. 8; and

25 Figure 9 is a flow-diagram illustrating the "ANALYZE AND STORE RESULTS IN LOG FILE" operation of Fig. 2B.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 illustrates a system for testing a web site, wherein, a testing computer 22 implements a testing process. The differences in the system of the prior art and the system of the present invention is the software running on the testing computer 22, or elsewhere in the system.

In Fig. 2 a computer apparatus 22' implements a process for testing a web site in accordance with the present invention. More particularly, an apparatus 22' of the present invention includes a computer 28, a keyboard 30, a video monitor 32, and preferably a mouse 34 or some other form of pointing device. As will be appreciated by those skilled in the art, the computer 28 includes a microprocessor 36 and computer readable memory 38 which support computer implemented processes. Displayed on the screen 40 of the monitor 32 is a web browser window 42 displaying a web page 44 of the present invention. The computer 28 and the peripherals 30, 34, and 40 comprise standard personal computer and workstation equipment, available from a variety of sources

Fig. 2A illustrates the relationship of tester software 46 of the present invention to web browser software 48 and the Internet 12. More particularly, the tester 46 communicates directly with the Internet 12 through ISP 24. That is, the tester 46 can pass HTTP to the Internet 12 and receive HTTP/HTML from the Internet 12 without the need for an intermediary of a web browser. The tester 46 communicates independently with the web browser 48 by sending HTTP to the web browser 48 and by receiving HTTP/HTML from the web browser 48.

As suggested in Fig. 2A, the tester 46 and the web browser 48 can be implemented on the same computer apparatus ("machine") or on separate computer apparatus. The case where the tester and the web browser have been implemented on the same computer apparatus 22', they both can operate under the same operating system, i.e. OS1=OS2. However, in the instance where the tester 46 and the web browser 48 are implemented on different computer apparatus, there is no reason why the two can't be supported on different operating systems, i.e. OS1 might be different from OS2. For example, the tester 48 may be implemented under a personal computer operating system such as under Windows 95, while the web browser 48 might be implemented on another computer under a workstation operating system such as UNIX.

In Fig. 2B, a flow-diagram illustrates various operations of the tester 46. At a main menu 50, it is determined whether the user wants to run the web site tester or to analyze results of previous web site tests. If it is determined that the user wishes to analyze results, a "logging

file" or "log file" is analyzed and results are displayed in an operation 52. Statistical methods for analyzing data, and tabular and graphical methods for displaying data are well known to those skilled in the art and will not be described here. If, on the other hand, it is determined from the main menu 50 that the web site tester is to be run, an operation 52 analyzes a test configuration file, as well as an activation schedule. The operation 52 has, as an input, a real-time clock 54 which can provide a real-time date 56 and real-time hours, minutes, and seconds 58. Often, a real time clock 54 provides one long number that represents elapsed time from a given date and time, and which can then be algorithmically converted into date, hours, minutes and seconds.

If operation 52 detects that a new test configuration file is being requested via a web browser 42, a "blank form" is sent in the form of HTTP/HTML to the browser. After the blank form has been filled in by a user of the browser, the process receives the information from the browser in an operation 62. This is returned in a form of HTTP, as will be appreciated by those skilled in the art. Then, operation 64 is used to create a new test configuration file, and process control is returned to operation 52.

If, on the other hand, operation 52 determines that the user wishes to edit a test configuration file, a "Fig. Form" is sent via HTTP/HTML to the browser in an operation 66. The edit information is received from the browser in operation 68 in the form of HTTP. An operation 70 then creates the edited test configuration file, and process control is returned to operation 52.

When operation 52 determines that it is time to execute the configuration file by analyzing the activation schedule and by comparing the activation schedule to information received from the real-time clock 54, process control is turned over to operation 72 to determine whether the execution of the configuration file is completed. If so, process control returns to operation 52. If not, then operation 74 sends HTTP to the web site and receives, in turn, HTTP/HTML from the web site that is being tested. The HTTP/HTML is analyzed and the results are stored in a log file. In addition, the analysis of operation 76 determines the nature of the next HTTP transmission to the web site in operation 74. This analysis will be described in greater detail below.

In Figs. 3A-3E, a number of exemplary web pages are presented to describe the process of the present invention. It should be noted this is just one example of a virtually unlimited number of web pages and web page combinations which can be tested by the process of the present invention.

In Fig. 3A an illustrated web page 78 is the "home page" of Freshwater Software, Inc. Among other features, it includes a series of buttons 80 which form "links" to other web pages. In particular, a button 82 makes a link to a "search" web page.

5 In Fig. 3B, the search web page 84 that was accessed by the button 82 of the home web page 78 includes a number of features including a data entry field 86 and a submit button 88. As seen in this example, the data entry field 86 includes the string "John", such that instances of the word "John" on the Freshwater Software web site will be found after the submit button 88 is activated. As is well known to users of web browsers, buttons such as buttons 82 and 88 are activated with a pointer device such as the mouse 34, or by pressing the "ENTER" key on
10 a keyboard 30.

Fig. 3C shows a results web page 90 listing all of the instances including the string "John" that is on the Freshwater site.

Fig. 3D illustrates a web page 92 for another company, Macromedia. A portion 94 of the web page 92 is a separate web page 94 as illustrated in Fig. 3E. This is an example of
15 "framing" wherein a web page is embedded within another web page. Such "nesting" or "embedding" can occur to multiple levels, *i.e.* frames within frames within frames.

Figs. 4A, 4B, 4C illustrate the web page 44 of Fig. 2 in greater detail. More particularly, these are the web pages used to create a "monitor object" which will be used to test and gather data concerning the operation of a web site under test. It should be noted that
20 multiple monitors monitoring multiple web sites or monitoring a single web site in multiple fashions can be operating simultaneously. This is a well-known function of an object oriented programming and of a multi-tasking computer system. However, the following description will be in the context of creating a specific monitor an object which will test the functionality of the pages of Figs. 3A-3E.

25 As noted in Fig. 4A, the "Add URL Transaction Monitor" refers to a number of steps. This particular web page 96 is created by activating the "SiteScope" button 96 of the button bar 98. Another button 100 labeled "Reports" can be used to generate test result reports. Therefore, it will be appreciated that the process 46 of Fig. 2B can utilize a web browser window 42 for user interface purposes.

30 Under step1 type, a pull down menu 102 is provided which has the entry of URL. This is because the step1 reference 104 must always be a URL to act as a starting point for the process. The URL can be the URL of a web site home page, or of any other web page. It is merely a starting point for the test. The step2 type pull down window 106 is a "link" to a button labeled "Search" as in a step2 reference 108. Step3 type is selected to be "Form" in

pull down menu 110, while the entry field 112 of step3 reference is left blank. Step4 type in pull down window 114 is "URL", while the URL in field 116 is input as "http://www.macromedia.com." An update box 118 is set at every 10 minutes an optional title that would appear in the monitor table from the field 120 is left blank. A button 122 is
5 activated if the monitor is to be created from this data.

In Fig. 4B, the web page 96 further includes a "disable" box 124 to temporarily disable the monitor sampling and alerting. Next, a step1 POST data field 126 has, as entries, "name = abc" and "address = def". The data in the POST data field 126 is used to fill in field
10 parameters. A step1 match content field 128 includes the string "Thank you for entering your name." A step1 "error if match" field 130 includes the string "invalid entry." A step1 authorization user name 132 includes a user name Paul, and step1 password field 134 including a password "secret." Step2 POST data and step3 POST data can likewise be entered.

In Fig. 4C, the end of the step3 POST data and the step4 POST data can be seen on the remainder of page 96. Below the words "Verify Error" a different portion of the web page 96
15 is presented which is generic to other parts of the software of the present invention. More particularly, pull down menu 136 permits the update period of minutes, hours, days, etc. to be selected while entry field 138 indicates the number of seconds, minutes, hours, etc. The update indicates the amount of time between checks whenever the status of the monitor indicates a problem.

20 A pull down menu 140 indicates a schedule for the monitor to be enabled. In this instance, it is selected to every day, all day. Alternatively, it could be scheduled for Monday through Friday, evenings only, etc. Custom schedules can be created by hitting the "edit schedule" button 142.

25 Fields 144 and 146 are optional fields which allows a user to enter monitor and report descriptions, respectively. A field 148 permits a time out period in seconds, to wait for the entire sequence to complete. That is, if a monitor session takes more than the time out period, an error or warning will be indicated.

30 The present invention also permits the use of a proxy server. The fields associated with an optional proxy server are shown at 150. In the field 150A, the HTTP proxy is entered. In field 150B, the proxy server user name is entered. In field 150C, the proxy server password is used.

A pull down menu 152 is used for the list order for the monitors. As noted previously, any number of monitor objects can be created to test multiple web sites or to test the same web site in multiple ways. The "list order" indicates where on a list of monitor objects the current

monitor object is to be added. In this instance, the list order is "last". Other list orders include "first", "middle", etc.

The web page 96 also includes an "Error" pull down menu 154 and a "Warning" pull down menu 156. In this instance, an error is set if the status is not equal to 200, which is a default, and a warning will occur if status is equal to -994, which is also a default. A status 200 means "good" and is associated with the status field of an HTTP request. The -994 default on the warning is an arbitrary internal coding indicating a software problem. For example, if the software takes more than 10 seconds to respond, a status -994 may be provided.

In Fig. 5, a form 158 is displayed to illustrate some of the concepts of the present invention. The form includes a first label 160 "name:" and a second label 162 called "address:". Associated with the labels 160 and 162 are entry fields 164 and 166, respectively. Also associated with the form is a "submit" button 168. The form 158 is as it may appear within a browser window. The HTML which creates the form 158 in the browser window is shown generally at 170. The use of HTML 170 to create a form 158 in a browser window is well known to those skilled in the art.

Fig. 6 illustrates a test configuration file 172 produced by filling out the web page 96 and hitting the "Add" monitor button 122. The test configuration file includes a number of labels or "tags" followed by an equal sign and either a parameter or a blank field. Where the field is blank, the tag is ignored and default values are used, if any.

As noted, the monitor description at 174 is an example of a five step transaction. Other tags such as frequency, time out, error frequency, etc. are filed in, while a number of tags are left blank. For example, since a proxy server is not being used, the tags for the proxy server are all left blank. The tags and parameters for step 1 are shown at 176. The "reference type 1" tag is associated with the parameter "URL". The tag reference 1 is associated with parameter <http://www.freshtech.com>. Steps 2, 3, 4, and 5 are found at 178, 180, 182, and 184, respectively. It should be noted that the step2 type is "blank", the step3 type is "form", the step4 type is "URL" and the step5 type is "frame". Therefore, this example of a test configuration file 172 illustrates four of the main types of features which can be verified and tested by the process of the present invention.

In Fig. 7, a flow diagram of the operation 52 in Fig. 2B is shown in greater detail. The process 52 begins at 186, and in operation 188, it is determined whether a new or edited configuration file has been created as set forth above. If so, a "monitor object" is created from the configuration file for one time execution in an operation 190. The creation and use of

software objects are well known to those skilled in the art. Then, in an operation 192, the monitor object is "invoked". By invoked it is meant to end that the monitor object is activated for use. In an operation 194, it is determined whether the monitor object is scheduled to run with regards to repeat time. If it is not, process control is returned to operation 188. If it is, it is determined in operation 196 whether the monitor object is scheduled to run by date and time. If not, process control is again returned to operation 188. If the monitor object is scheduled to run with regards to both repeat time and by date and by time, then the monitor is "run" in an operation 198. By "run" it is meant that the monitor object is caused to perform the process of the present invention to test a web site.

In Fig. 8, a flow diagram illustrates the process 74 of Fig. 2B in greater detail. The process 74 begins at 200, and in an operation 202, the "next step" and cookie is retrieved. The next step is the next test step as described above. The "cookie" is a data file received from the web site being tested that includes information concerning user preferences, user history, etc. An operation 204 determines whether the next step is a null and if so, the process is completed at 206. If there is a next step, operation 208 determines the step type, as described below.

If operation 208 determines that the next step type is "URL" a step 210 sends an HTTP request for the URL and the cookie associated with that URL. Process control is then turned over to an operation 211 which takes measures based on the HTTP request and response, analyzes received HTML for expected content and errors using methods such as matching against string valves, regular expressions, and calculated valves and stores them in a database. Error analysis and matching methods are well known to those skilled in the art. Process control then returns to operation 202.

If operation 208 determines that the step type is a "link", an operation 212 searches the current HTML for a "link" tag having the specified content. In operation 214 determines whether the appropriate "link" has been found and, if not, an error message 216 is generated the process aborts at 218. If the link is found by the operation 214, an operation 220 sends an HTTP request for the URL and the cookie and process control reverts to operation 211.

If operation 208 determines that the step type is "form", an operation 222 searches the current HTML for a "submit" button with the specified content. An operation 224 determines whether the appropriate "submit" button has been found, and if not, operation 228 determines that there is an error and the process 76 aborts at 229. If the appropriate submit button is found by operation 224, an operation 230 finds all fields on the form with the submit button and determines or calculates the default values for this field. An operation 232 then takes the supplied post data and overlays the default values such that all appropriate fields have been

filled. An operation 234 then sends an HTTP request "post" plus the cookie and process control returns to 211.

5 If operation 208 determines that the step type "frame" an operation 236 searches the current HTML for a "frame" tag. An operation 238 determines whether the appropriate frame tag has been found. If not, an operation 240 indicates an error and the process 76 aborts at 241. If the appropriate frame tag has been found by operation 238, an operation 242 sends an HTTP request for the URL and the cookie. Process control then returns to operation 211.

10 In Fig. 8A, the operation 230 of Fig. 8 is described in greater detail. The process 230 begins at 243 and, in a operation 244, all form input elements are determined. If a form input element is not recognized, then the process is complete at 260. If operation 244 finds a radio button input element, operation 248 picks the first radio button for the value. If the operation 244 finds a check-box for the input element, an operation 250 determines whether the box is checked. If it is, an operation 252 sets the value, and if it is not an operation 254 indicates that there is no value. If an operation 244 finds a text input element, an operation 256 sets the value to the default string. If operation 244 finds pop-up menu, an operation 258 picks the default as the value. The process 230 is then complete at 260.

20 In Fig. 8B, the process 232 of Fig. 8 is illustrated in greater detail. The process 232 begins at 262 and, in an operation 264, values from operation 230 (see Fig. 8) are written into the name tags. For example, name1 is set to an arbitrary or default value1, name2 is set to an arbitrary or default value2, etc. Next, in an operation 266, the "post data" entered by the user is used to override the appropriate name tags. In this instance, the name tag "name 2" is set to the data "Paul". The final, merged data is illustrated at 268 and the process is completed at 270.

25 In Fig. 9, the process 76 of Fig. 2B is illustrated in greater detail. The process 76 begins at 272, and in an operation 274, it is determined whether there are any aborts that occurred within the process 74. If there were, an operation 276 displays and logs a an error message. If there were not any aborts, then the process 74 terminated normally in an operation 278, and the process displays and logs the URL and the size of each web page and the time it took to download into a log file. An operation 280 displays and logs the total time for the download in an operation 280. In an operation 281 it is determined whether there are any alerts. If there were, an operation 282 activates a process. The process would commonly notify a person using a mechanism such as e-mail or pager or cause a user-specified process to start. The process is then complete at 283.

While this invention has been described in terms of several preferred embodiments, it is contemplated that alternatives, modifications, permutations and equivalents thereof will become apparent to those skilled in the art upon a reading of the specification and study of the drawings. It is therefore intended that the following appended claims include all such
5 alternatives, modifications, permutations and equivalents as fall within the true spirit and scope of the present invention.

What is claimed is:

CLAIMS

1. A method for testing a web site comprising:

5 formulating a test configuration file comprising a series of test inquiries for a web site
to be tested;

initiating an HTTP communication to form a connection with said web site; and

repetitively communicating with said web site by:

receiving HTML from said web site;

analyzing said HTML for errors and storing results in a database; and

10 formulating a new HTTP communication based upon said received HTML and
said test configuration file.

2. A method for testing a web site as recited in claim 1 wherein said operation of
formulating a test configuration file comprises:

15 sending HTML comprising a blank testing form to a web browser;

receiving HTTP from said web browser as a submission from said HTML testing form;
and

developing said test configuration file from said HTTP from said web browser.

20 3. A method for testing a web site as recited in claim 2 wherein said operation of
formulating a test configuration file further comprises:

developing a filled testing form from an existing test configuration file;

sending HTML comprising said filled testing form to a web browser;

receiving HTTP from said web browser as a submission from said HTML testing form;

25 and

updating said test configuration file from said HTTP from said web browser.

4. A method for testing a web site as recited in claim 1 wherein said method is implemented as a computer implemented process.

5

5. A method for testing a web site as recited in claim 4 wherein said computer implemented process is capable of direct HTTP and HTML communication with said web site.

6. A method for testing a web site as recited in claim 5 wherein said direct HTTP and HTML communication is over a TCP/IP protocol network.

10

7. A method for testing a web site as recited in claim 1 further comprising analyzing said database and providing a display of the results of said web site testing.

8. A method for testing a web site as recited in claim 1 wherein said test configuration file provides a plurality of tests selected from the group comprising a URL, a link, a form button, and a frame.

15

9. A method for testing a web site as recited in claim 1 further comprising analyzing said database and sending alerts of the results of said web site testing.

20

10. A method for testing a web site as recited in claim 8 wherein said test configuration file includes comparison data used to compare HTML received from said web server with a predetermined criteria.

25

11. A method for testing a web site as recited in claim 1 wherein said test configuration file comprises an automatic scheduling for testing said web site.

12. A method for testing a web site as recited in claim 1 wherein said automatic scheduling includes scheduling window information, and test repetition information.

5 13. A method for testing a web site as recited in claim 1 further comprising:

creating a monitor object from said test configuration file; and

repetitively testing said web site by

evoking said monitor object;

determining whether said monitor object is scheduled to be run; and

10 running said monitor object when it is scheduled to be run to initiate said HTTP communication to form a connection with said web site and by repetitively communicating with said web site.

14. A computer readable media including the program instructions and data for
15 implementing the method of claim 1.

15. An apparatus for testing a web site comprising:

a computer having memory and a processor;

20 a monitor object residing at least partially in said memory and executed by said processor, said monitor object including

means for initiating an HTTP communication to form a connection with a web site; and

means for repetitively communicating with said web site by

receiving HTML from said web server;

analyzing said HTML for errors and storing results in a database; and

25 formulating a new HTTP communication based upon said received HTML.

16. An apparatus for testing a web site as recited in claim 15 further comprising:

a scheduler operative to

5 invoke said monitor object;

determine whether said monitor object is scheduled to be run; and

running said monitor object when it is scheduled to be run to initiate said HTTP communication to form a connection with said web site and by repetitively communicating with said web site.

10

17. An apparatus for testing a web site as recited in claim 16 further comprising:

means for creating said monitor object from a test configuration file.

18. An apparatus for testing a web site as recited in claim 17 further comprising:

15 means for creating said test configuration file by communication with a web browser.

19. A system for testing a web site comprising:

a TCP/IP protocol network;

a web server connected to said TCP/IP protocol network and hosting a web site;

20 a testing computer connected to said TCP/IP protocol network, said testing computer having memory and a processor, said testing computer being operative to formulate a test configuration file stored in said memory comprising a series of test inquiries for a web site to be tested, to initiate an HTTP communication to form a connection with said web site, and to repetitively communicate with said web site by receiving HTML from said web site; analyzing
25 said HTML for errors and storing results in a database; and formulating a new HTTP communication based upon said received HTML and said test configuration file.

20. A system for testing a web site as recited in claim 19 wherein said testing computer includes a monitor object residing at least partially in said memory and executed by said processor.

5

21. A system for testing a web site as recited in claim 20 wherein said testing computer includes a scheduler operative to invoke said monitor object, determine whether said monitor object is scheduled to be run; and running said monitor object when it is scheduled to be run to initiate said HTTP communication to form a connection with said web site and by repetitively communicating with said web site.

10

22. An apparatus for testing a web site comprising:

computer means including

means for formulating a test configuration file comprising a series of test inquiries for a web site to be tested;

15

means for initiating an HTTP communication to form a connection with said web site; and

means for repetitively communicating with said web site by:

receiving HTML from said web site;

20

analyzing said HTML for errors and storing results in a database; and

formulating a new HTTP communication based upon said received HTML and said test configuration file; and

connecting means for connecting said computer means to a TCP/IP network through which said web site can be accessed.

25

23. An apparatus for testing a web site as recited in claim 22 wherein said means for formulating a test configuration file comprises:

means for sending HTML comprising a blank testing form to a web browser;

means for receiving HTTP from said web browser as a submission from said HTML testing form; and

5 means for developing said test configuration file from said HTTP from said web browser.

24. An apparatus for testing a web site as recited in claim 23 wherein said means for formulating a test configuration file further comprises:

means for developing a filled testing form from an existing test configuration file;

10 means for sending HTML comprising said filled testing form to a web browser;

means for receiving HTTP from said web browser as a submission from said HTML testing form; and

means for updating said test configuration file from said HTTP from said web browser.

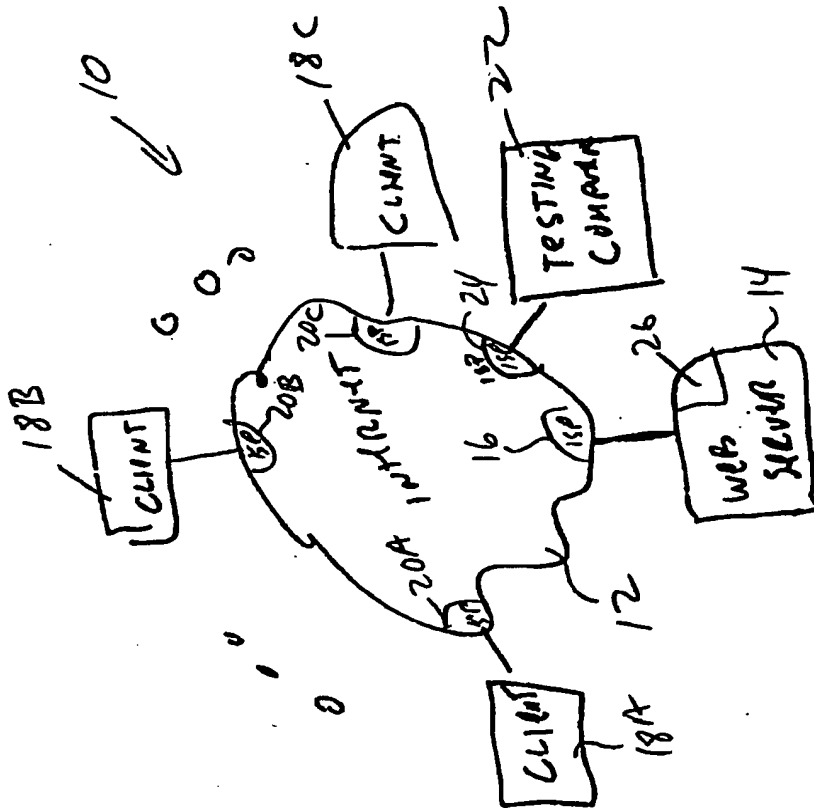
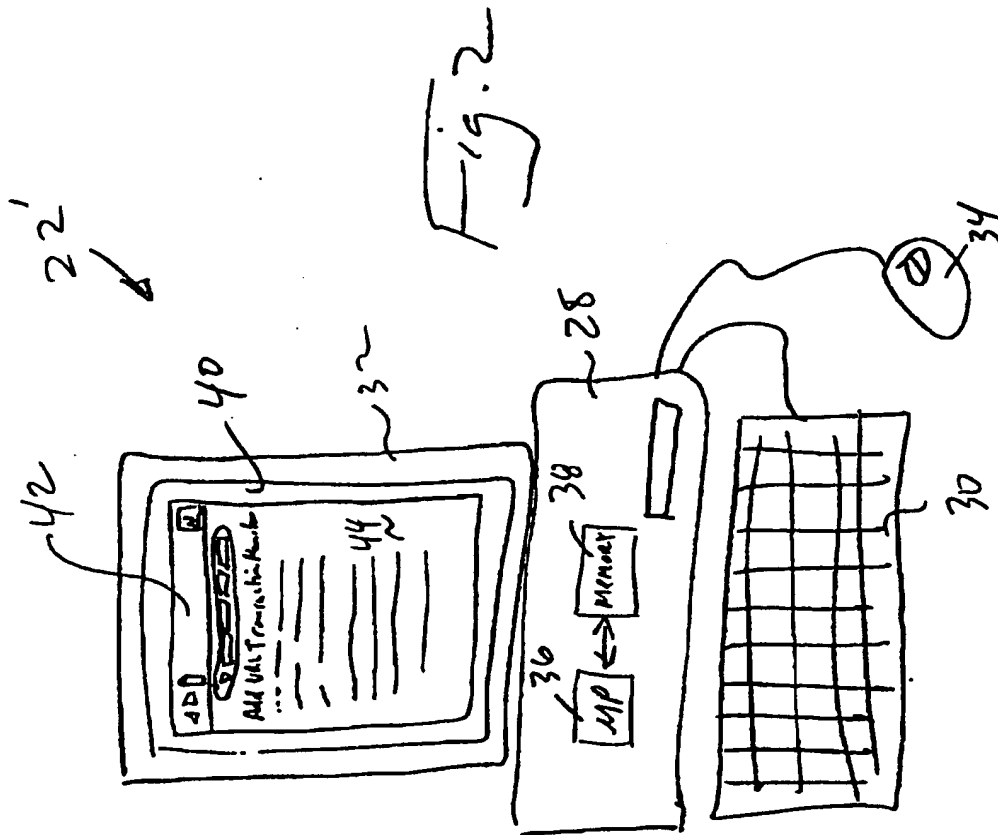


Fig. 1




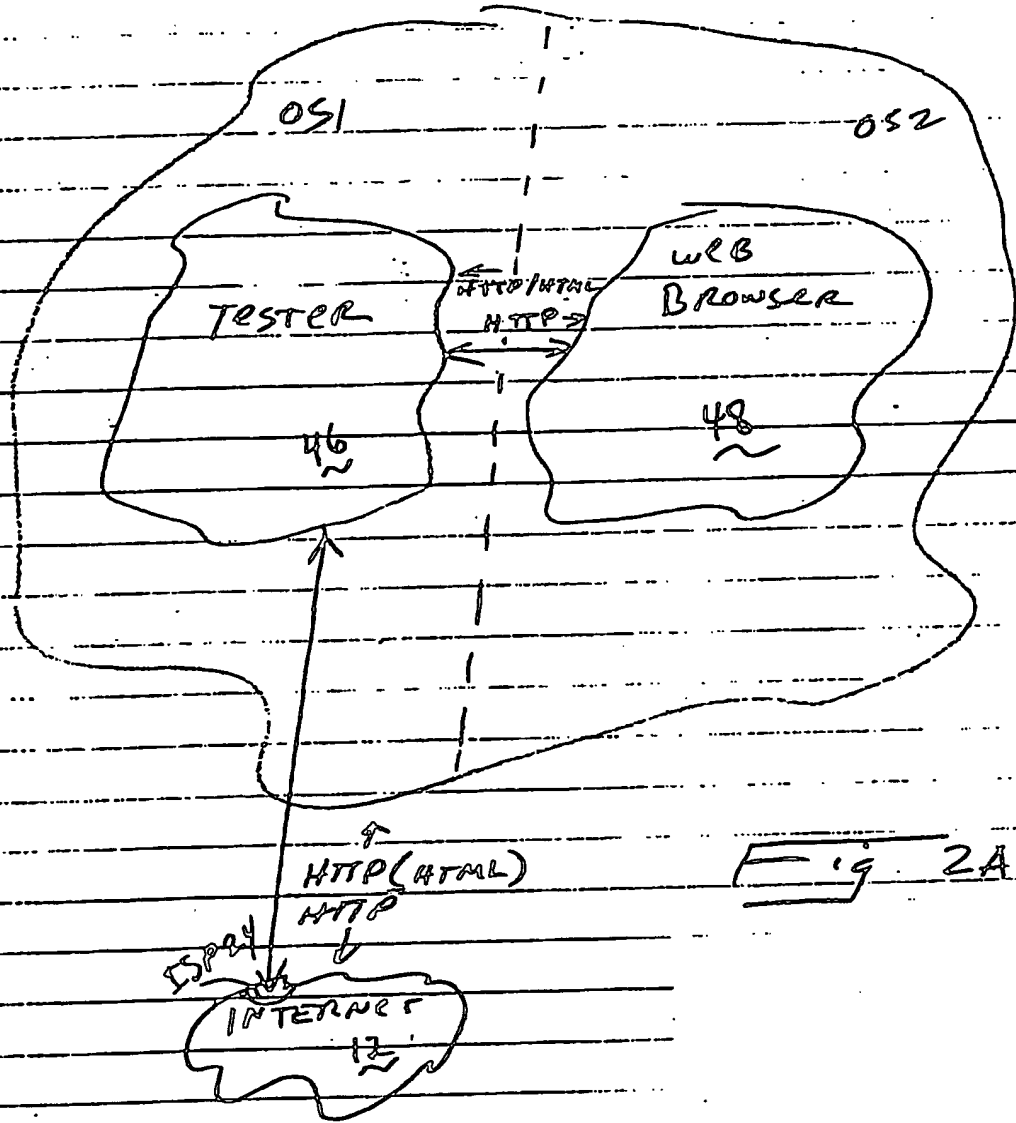


Fig. 2A

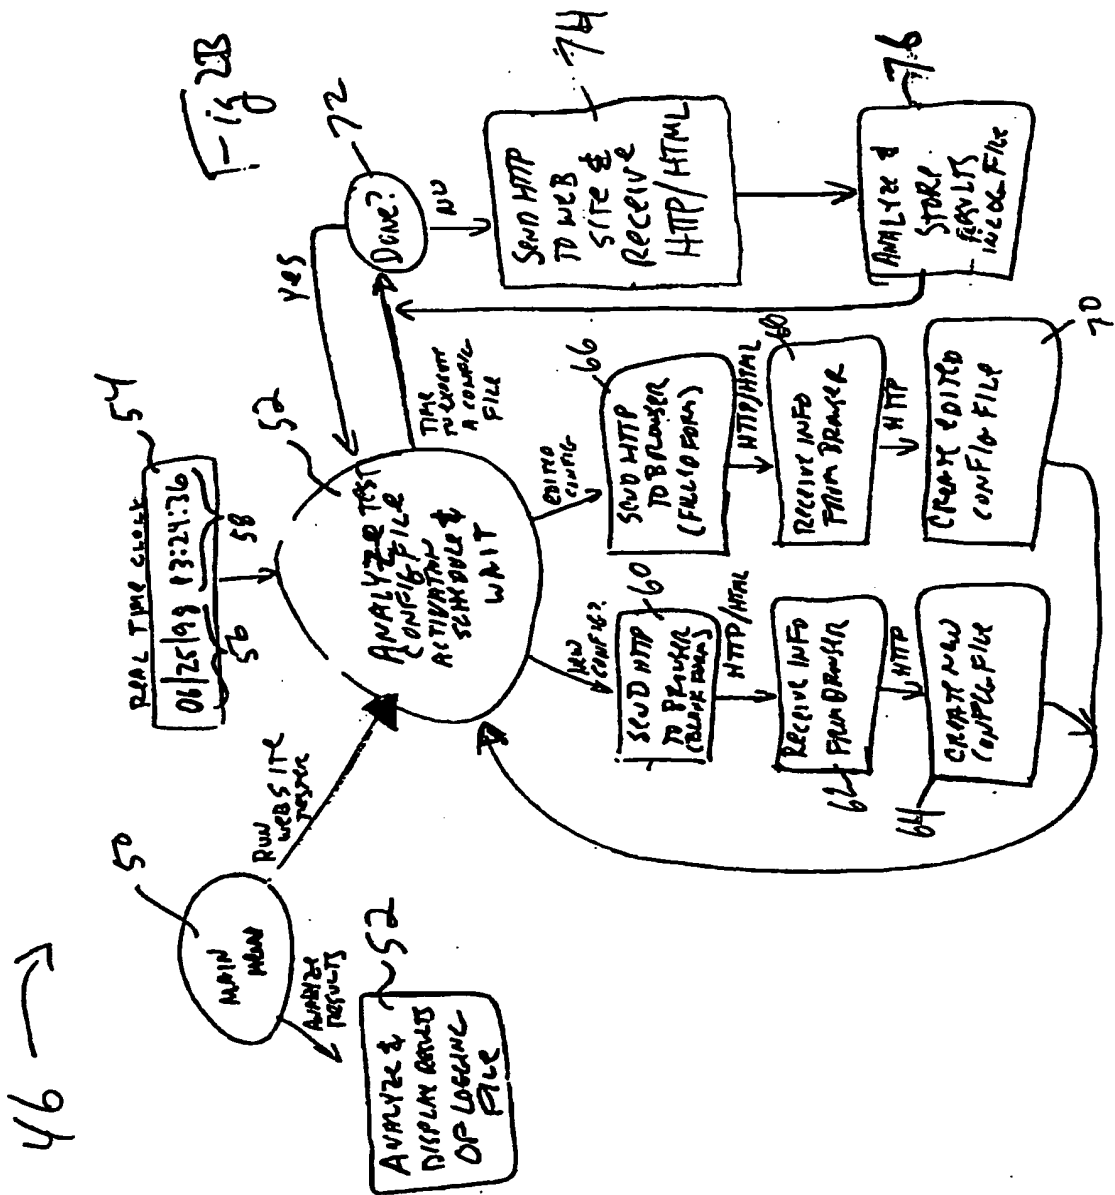

f r e s h w a t e r  s o f t w a r e

[download](#) | [order](#) | [products](#) | [support](#) | [search](#) | [about us](#)

Is your business-critical web site up right now?

How do you know?

If you had SiteScope and SiteSeer, not only would you know if your web site was up, you would be confident that you would be notified immediately if a problem did occur. SiteScope allows you to monitor everything from memory and disk space usage to URL and service availability. Error notification is available via e-mail, pager, and SNMP traps. SiteScope can also run recovery scripts to correct common problems. The SiteSeer service monitors your site remotely, letting you know of problems your visitors are experiencing, but you're unaware of. Together, SiteScope and SiteSeer help ensure that your site is up and running smoothly 24 hours a day, 7 days a week.

SiteScope Software

- Version 3.0 Available Now!
- 24 hour monitoring of web pages, forms, servers, and more...
 - Immediate error notification via e-mail, pager, or SNMP trap
 - Escalation of notification
 - Automatic error recovery
 - Ability to integrate with enterprise solutions

[Review SiteScope 3.0's release notes](#)

[try it](#) | [buy it](#) | [more info](#)

SiteSeer Service

- E-commerce Transaction Testing Available!
- Remote web site monitoring 24 hours a day
 - Support for secure URLs
 - Verification of password protected pages
 - String matching on both page content and error messages

[try it](#) | [buy it](#) | [more info](#)

Fresh News...

- PCToday raves about SiteScope in the work place in its February issue. [Full Story](#)
- DIGEX chooses SiteScope to monitor the world's largest dedicated server web site management facilities. [Full Story](#)
- SiteScope receives a Five Palm Tree rating from Beverly Hills Software. [Full Story](#)

"They've found an important niche from a web server administrator perspective... It's expandable and customizable; it's a fantastic product."

-- Brad Hogan, Newbridge Networks. [More customer quotes](#)

[HOME](#) | [ORDER](#) | [PRODUCTS](#) | [SUPPORT](#) | [SEARCH](#) | [ABOUT US](#)

visit us at www.freshtech.com

Freshwater
Software™

[Contact Us](#)

© Copyright 1998 by Freshwater Software, Inc., Boulder, Colorado. All rights reserved.

← 80

↑
82

78
~

Fig. 3A

6/18

f r e s h w a t e r s o f t w a r e

[home](#) [order](#) [products](#) [support](#) [search](#) [about us](#)

Search Us

To search the documents on the Freshwater Software™ Web site, enter the words you want to search for below.

Search For

By default, only documents containing all the words are found. To find documents containing any of the words, separate them with "OR". For example, 'mail OR support' to find any documents containing either of these words.

Site Contents

Order

- [Ordering Options](#)
- [Online Order Form](#)
- [Product Pricing](#)
- [Fax or E-mail Order Form](#)

Products

- [SiteScope](#)
 - [Product Overview](#)
 - [Technical Specifications](#)
 - [List of Monitors](#)
 - [Download Page](#)
 - [Order Form](#)
 - [Pricing Information](#)
 - [Live Demo](#)
 - [Product Support Options](#)
 - [SiteScope FAQ](#)
 - [SiteScope Logos](#)
 - [License Agreement](#)
- [SiteSeer](#)
 - [Product](#)

Support

- [Online Documentation](#)
- [Software FAQ](#)
- [E-mail Support](#)

About Us

- [Corporate Fact Sheet](#)
- [Management Bios](#)
- [Employee List](#)
- [Contact Info](#)
- [Directions to our Office](#)
- [Press Releases](#)
- [Freshwater in the Press](#)
- [SiteScope Data Sheet](#)
- [Customer Quotes](#)
- [SiteScope Screen Shots](#)
- [SiteSeer Data Sheet](#)
- [Management Biographies](#)

+ 19.38

f r e s h w a t e r  s o f t w a r e

[home](#) | [order](#) | [products](#) | [support](#) | [search](#) | [about us](#)

Search Results

Searching for: John

- [Who We Are \(Thu 5 Feb 98\)](#)
"john" 5 (John)
- [SiteScope FAQ \(Wed 3 Jun 98\)](#)
"john" 4 (John)
- [Freshwater Software Contact Information \(Thu 5 Feb 98\)](#)
"john" 3 (John)
- [Chief Technical Officer \(Tue 26 May 98\)](#)
"john" 2 (John)
- [Escalation Rules \(Fri 9 Jan 98\)](#)
"john" 2 (John)
- [DIGEX Selects Freshwater Software's SiteScope to Enhance Reliability for its Web Site Management Customers \(Thu 5 Feb 98\)](#)
"john" 1 (John)
- [MANAGEMENT BIOGRAPHIES \(Thu 5 Feb 98\)](#)
"john" 1 (John)
- [Freshwater Software™ Press Release \(Fri 30 May 97\)](#)
"john" 1 (John)
- [THE FRESHWATER SOFTWARE PRESS ROOM \(Thu 5 Feb 98\)](#)
"john" 1 (John)
- [Freshwater Software™ Press Release \(Thu 5 Feb 98\)](#)
"john" 1 (John)

[HOME](#) | [ORDER](#) | [PRODUCTS](#) | [SUPPORT](#) | [SEARCH](#) | [ABOUT US](#)

visit us at www.freshtech.com

Freshwater
Software™

[Contact Us](#)

© Copyright 1998 by Freshwater Software, Inc., Boulder, Colorado. All rights reserved.

This searchable archive was implemented with the [ICE search engine](#)

90
~

Fig. 3C

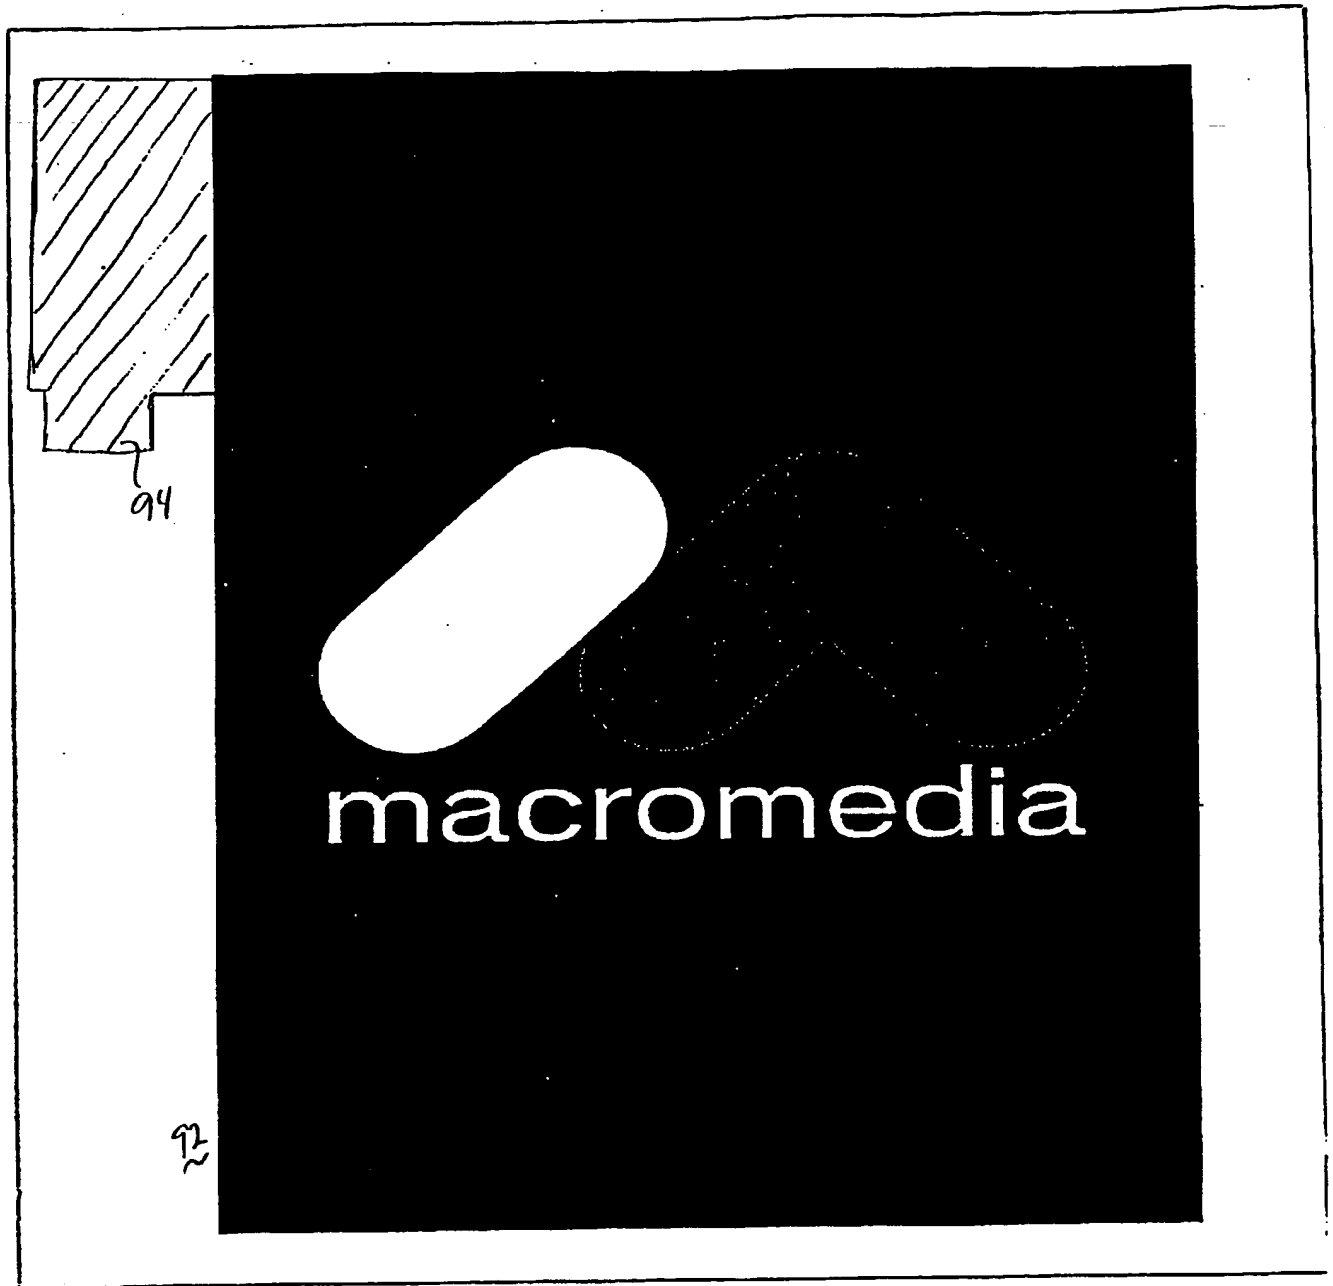


Fig. 3D



Fig. 94

Fig. 3E

10/18

10 day SiteScope evaluation license
(10 days remaining)

SiteScope Group Reports Help

Add URL Transaction Monitor

Step 1 Type the type of item being referred to in the reference (the next field) - this is used to determine with parts of the HTML will be scanned for text matches.

Step 1 Reference the URL, link, or submit button to be followed at this step (examples: a URL of http://demo.freshtech.com, a link of Next, or a button name of Submit)

Step 2 Type the type of item being referred to in the reference (the next field) - this is used to determine with parts of the HTML will be scanned for text matches.

Step 2 Reference the URL, link, or submit button to be followed at this step (examples: a URL of http://demo.freshtech.com, a link of Next, or a button name of Submit)

Step 3 Type the type of item being referred to in the reference (the next field) - this is used to determine with parts of the HTML will be scanned for text matches.

Step 3 Reference the URL, link, or submit button to be followed at this step (examples: a URL of http://demo.freshtech.com, a link of Next, or a button name of Submit)

Step 4 Type the type of item being referred to in the reference (the next field) - this is used to determine with parts of the HTML will be scanned for text matches.

Step 4 Reference the URL, link, or submit button to be followed at this step (examples: a URL of http://demo.freshtech.com, a link of Next, or a button name of Submit)

Update every amount of time between checks of a monitor

Title title that should appear in the Monitor table (optional)

☐ Add Monitor

Fig. 49

11/18

96
~

☒ 124 Disable
temporarily disable monitor sampling and alerting

Step 1 POST Data 126
 Name = ABC
 Address = DEF
 optional name=value variables, one per line, to send with a POST request for this step

Step 1 Match Content 128
 Thank you for entering your name
 optional text to match against content of the URL for this step

Step 1 Error If Match 130
 Invalid entry
 optionally generate an error if the content of the URL for this step contains this text

Step 1 Authorization User Name 132
 PAUL
 optional user name if the URL for this step requires authorization

Step 1 Password 134
 SECRET
 optional password if the URL for this step requires authorization

Step 2 POST Data
 optional name=value variables, one per line, to send with a POST request for this step

Step 2 Match Content
 optional text to match against content of the URL for this step

Step 2 Error If Match
 optionally generate an error if the content of the URL for this step contains this text

Step 2 Authorization User Name
 optional user name if the URL for this step requires authorization

Step 2 Password
 optional password if the URL for this step requires authorization

Step 3 POST Data
 optional name=value variables, one per line, to send with a POST request for this step

Step 3 Match Content
 optional text to match against content of the URL for this step

Step 3 Error If Match
 optionally generate an error if the content of the URL for this step contains this text

Step 3 Authorization User Name
 optional user name if the URL for this step requires authorization

Fig. 4b

Step 3 Password	<input type="text"/>	optional password if the URL for this step requires authorization
Step 4 POST Data	<input type="text"/>	optional name=value variables, one per line, to send with a POST request for this step
Step 4 Match Content	<input type="text"/>	optional text to match against content of the URL for this step
Step 4 Error If Match	<input type="text"/>	optionally generate an error if the content of the URL for this step contains this text
Step 4 Authorization User Name	<input type="text"/>	optional user name if the URL for this step requires authorization
Step 4 Password	<input type="text"/>	optional password if the URL for this step requires authorization
Verify Error if the monitor detects an error, immediately perform the check again to verify the error.		
Update every (on errors)	<input type="text" value="60"/> minutes	the amount of time between checks whenever the status of the monitor is not ok, the Update value from above is used if this is left blank
Schedule	<input type="text" value="every day, all day"/>	schedule for the monitor to be enabled - for example, disable Sunday from 10:00 to 14:00, if blank monitor is always enabled
Monitor Description	<input type="text"/>	additional description of monitor that appears on Monitor Detail page (optional)
Report Description	<input type="text"/>	additional description of monitor that appears on Reports and in monitor popup info (optional)
Timeout	<input type="text" value="60"/>	the time out, in seconds, to wait for entire sequence to complete
HTTP Proxy	<input type="text" value="150A"/>	optional proxy server to use including port (example: proxy.freshitech.com:8080)
Proxy Server User Name	<input type="text" value="150B"/>	optional user name if the proxy server requires authorization
Proxy Server Password	<input type="text" value="150C"/>	optional password if the proxy server requires authorization
List Order	<input type="text" value="last"/>	choose where this monitor appears in the list of monitors on the Monitor Detail page
Error if	<input type="text" value="status 5/200 (default)"/>	
Warning if	<input type="text" value="status -994 (default)"/>	

122

136

136

142

144

146

148

150

152

154

156

96

Ada Monitor

Fig. 4c


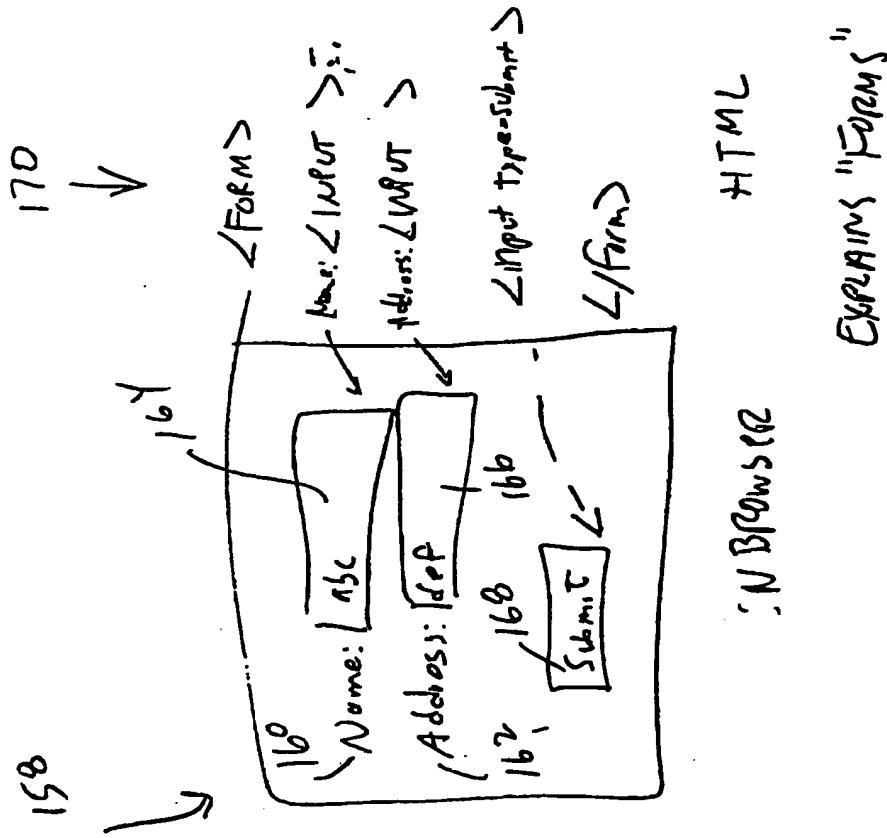


Fig. 5

Fig-6

example.mg

```
174 _id=1
    _class=URLSequenceMonitor
    _name=URL Transaction: http://www.freshtech.com
    _description=
    _monitorDescription=Example transaction of 5 steps
    _frequency=600
    _timeout=60
    _errorFrequency=120
    _disabled=false
    _verifyError=false
    _proxy=
    _proxyusername=
    _proxypassword=
    _schedule=
    176 { _referenceType1=url
        _reference1=http://www.freshtech.com
        _errorContent1=Not Found
        _username1=
        _password1=
        _content1=
        178 { _referenceType2=link
            _reference2=SEARCH
            _errorContent2=
            _username2=
            _password2=
            _content2=
            180 { _referenceType3=form
                _reference3=Find Documents
                _postData3=KEYWORDS=John
                _content3=Officer
                _errorContent3=
                _username3=
                _password3=
                182 { _referenceType4=url
                    _reference4=http://www.macromedia.com/index.html
                    _errorContent4=
                    _username4=
                    _password4=
                    _content4=
                    184 { _referenceType5=frame
                        _reference5=mm_nav
                        _errorContent5=
                        _username5=
                        _password5=
                        _content5=
```

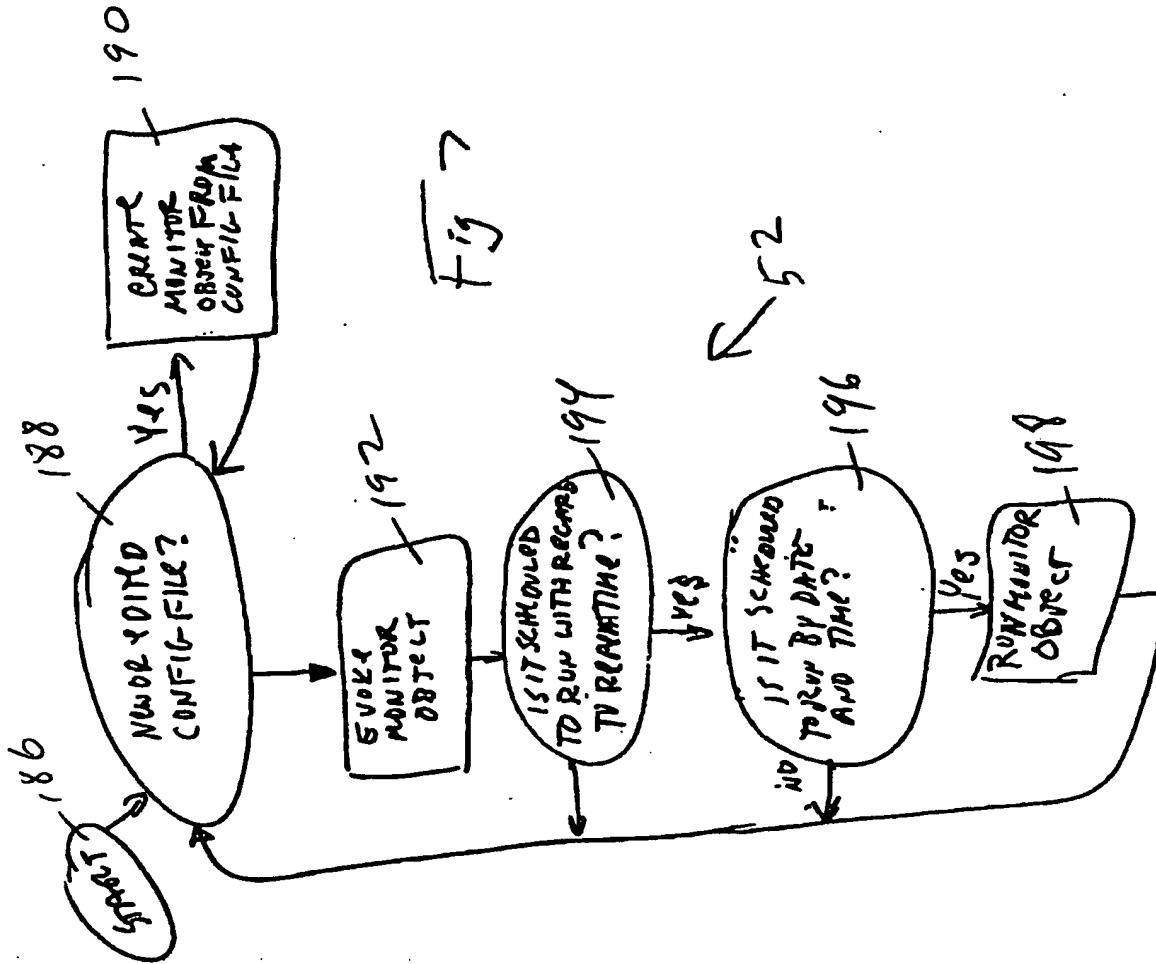

17/18

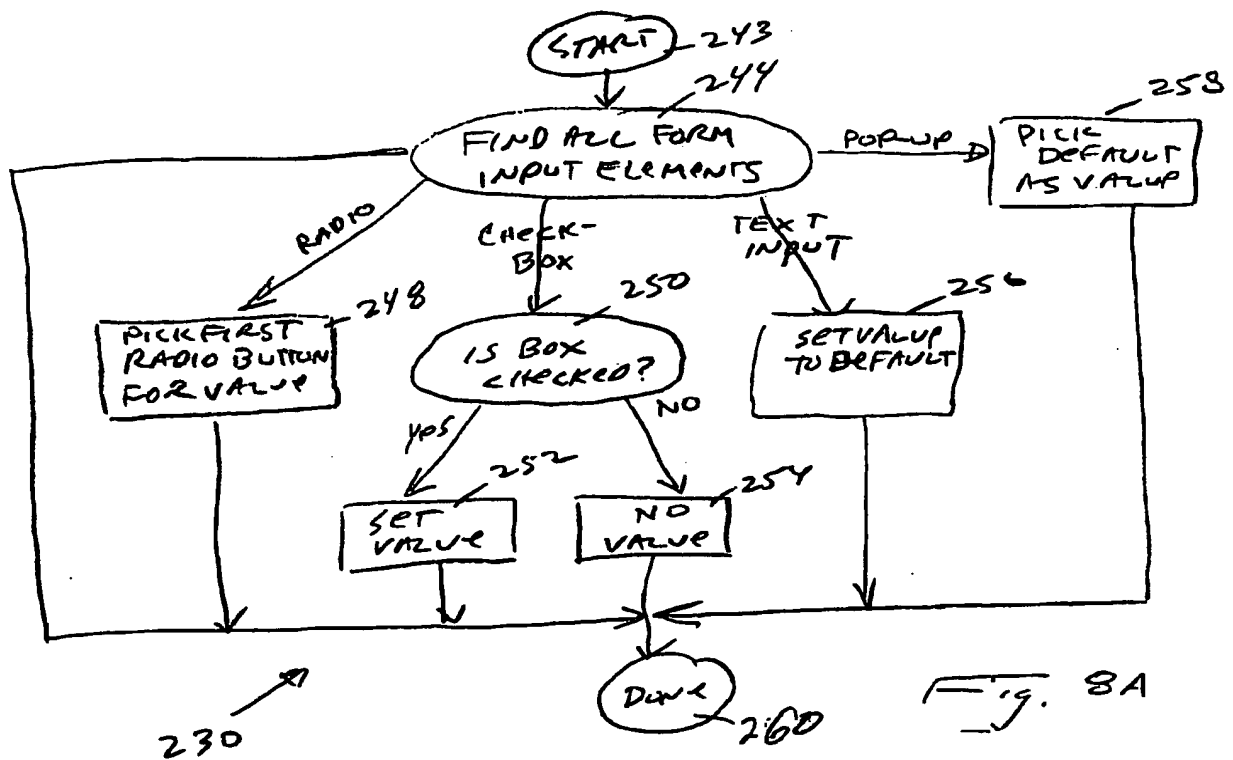


Fig. 8A


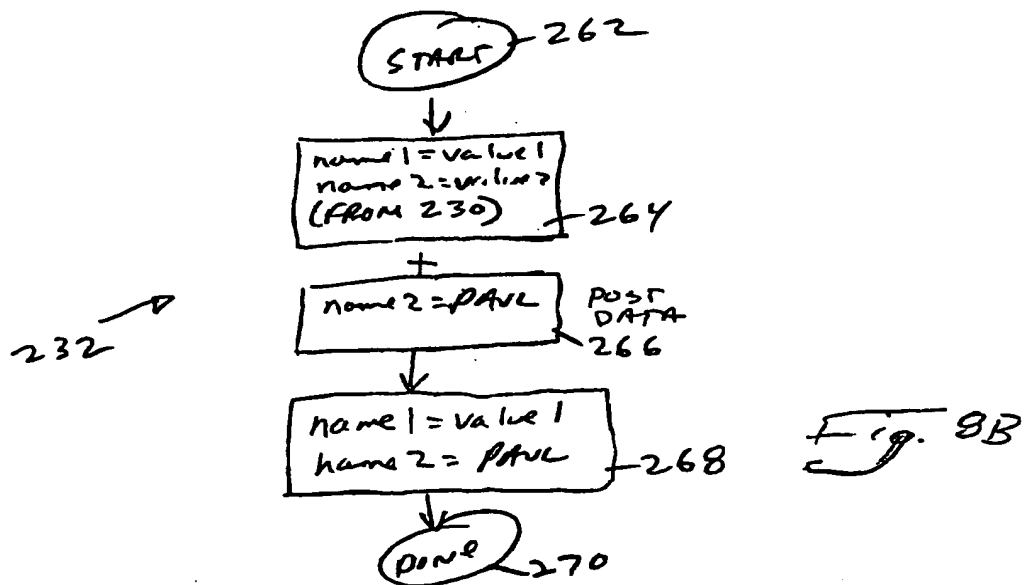


Fig. 8B

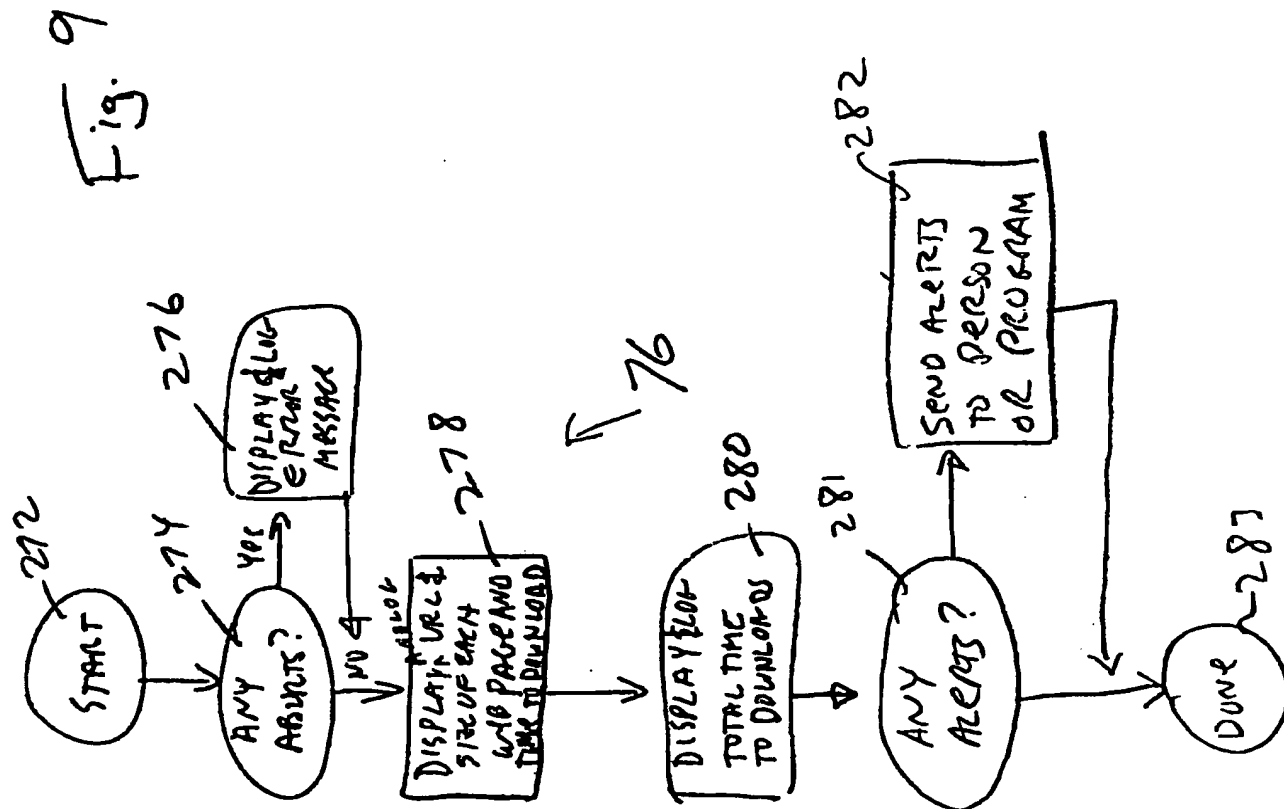

INTERNATIONAL SEARCH REPORT

 International application No.
 PCT/US99/23158

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : G06F 13/00 US CL : 709/224 According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 709/202,218,223,224,227 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched NONE Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WEST search terms: test\$ near3 (web\$ adj2 (site? or page?))				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	US 5,958,008 A (POGREBISKY et al.) 28 September 1999, Abstract, col. 18 Lines 10-20).	1-24		
A,P	US 5,870,559 A (LESHEM et al.) 09 February 1999, Abstract, col. 18 (lines 35-45)).	1-24		
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.				
<table border="0"> <tr> <td> * Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *A* document member of the same patent family </td> </tr> </table>			* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *A* document member of the same patent family
* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *A* document member of the same patent family			
Date of the actual completion of the international search 21 FEBRUARY 2000		Date of mailing of the international search report 02 MAR 2000		
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer ROBERT B. HARRIS <i>James R. Matthews</i> Telephone No. (703) 305-9692		

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.